

# Specification

Curve Lighting System

AS3535-15A45/15A90





# AS3535-15A45/15A90



## Features

- Various installation ways: pendant, recessed and surface mounted
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- Specially designed light source with diffusers producing homogeneous and soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

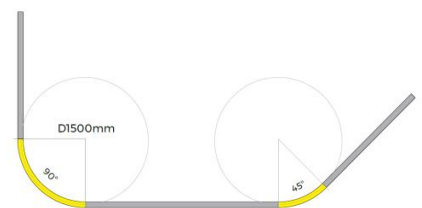







## Details





## Optional Accessories

Picture	Item	Parameter
	①Profile	Material : AL6063-T5 Profile weight : 0.49kg/ D1500mm , 45° Size : 35x35mm , D1500mm , 45° 35x35mm , D1500mm , 90° Surface processing: Spray
	②Cover	Size : L20000*W32*H3.5mm Light transmittance: 60%
	③End cap	Size : L35*W35*H1.5mm
	④Rigid modular DY8140-24V-20mm-15A45	Material:AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 11.6W/pcs ; Lumen : 1300Lm/m ; Width : 20mm ; Minimum cutting unit : 14LEDs ;
	⑤Screw set	Size : M3.5*40mm

Picture	Item	Parameter
	Pendant cable PY-CBCA	Size : $\phi 350 \times H20$ mm
	Pendant cable PN-WA2/4	Steel cable: $D1.5 \times 2000 \setminus 4000$ mm\maximum load bearing:13Kg
	Pendant cable PN-CA2/4	Size : 20AWG\2000mm\maximum load bearing:6.5Kg
	Recessed buckle RE-13	Size : L78*W34*H15mm
	Connect fitting EX-26	Size : L30*W23.5*H4.6mm
	Surface mounted buckle CL-05	

## Optical Parameter

AS3535-15A45 module\DY8140-24V-20mm-15A45 light source, frosted diffuser

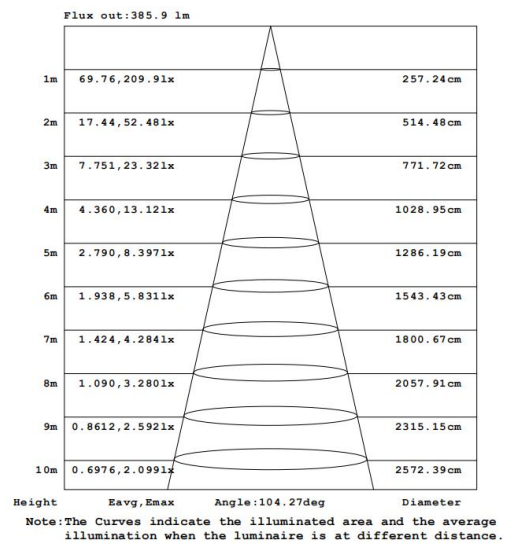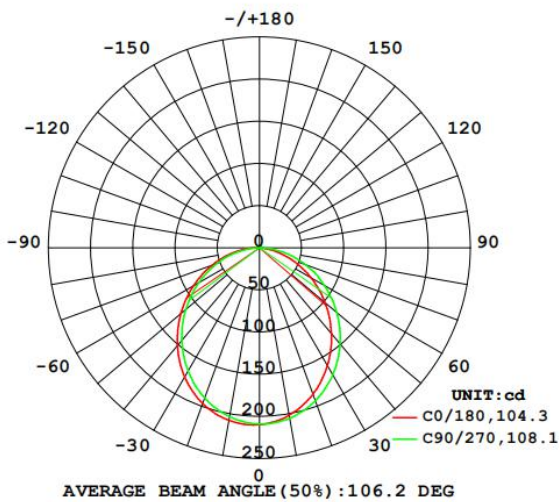

## Package



Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
15A45	Hat box	675*260*158mm	10.62	13.62	18pcs/box
15A90	Hat box	1170*435*158mm	21.24	24.24	18pcs/box