

Specification

Curve Lighting System

AH5060-10A45/10A90





AH5060-10A45/10A90



Features



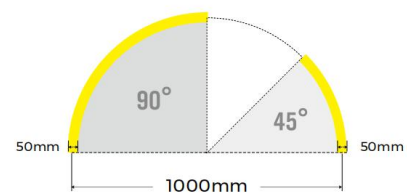

- Lighting direction : Lighting upward and downward
- Various installation ways: pendant, surface mounted
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver








Details





Optional Accessories

Picture	Item	Parameter
	①Profile	Material : AL6063-T5 Profile weight : 0.48kg / D1000mm , 45° Size : 50x60mm , D1000mm , 45 50x60mm , D1000mm , 90° Surface processing: Spray
	②Cover	35 cover Size : L20000*W32*H3.5mm 50 cover Size : L20000*W47*H4mm Light transmittance: 60%
	③End cap	Size : L60*W50*H2mm
	④Rigid modular DY8140-24V-20mm-10A45	Material : AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 7.5W/pcs ; Lumen : 820Lm/m ; Width : 20mm ; Minimum cutting unit : 14LEDs ;
	⑤Screw set CL-15	Size : M3.5*50mm

Picture	Item	Parameter
	Pendant cable PY-CBCC	Size : $\phi 250 * H25mm$
	Pendant cable PN-WA2/4	Steel cable: $D1.5 * 2000 \setminus 4000mm \setminus$ maximum load bearing:13Kg
	Pendant cable PN-CA2/4	Size:20AWG\2000mm\maximum load bearing:6.5Kg
	Connect fitting EX-25	Size : $L39.5 * W20 * H12mm$
	Clips CP-29	

Optical Parameter

AH5060-10A45 module/DY8140-24V-20mm-10A45 light source, frosted diffuser

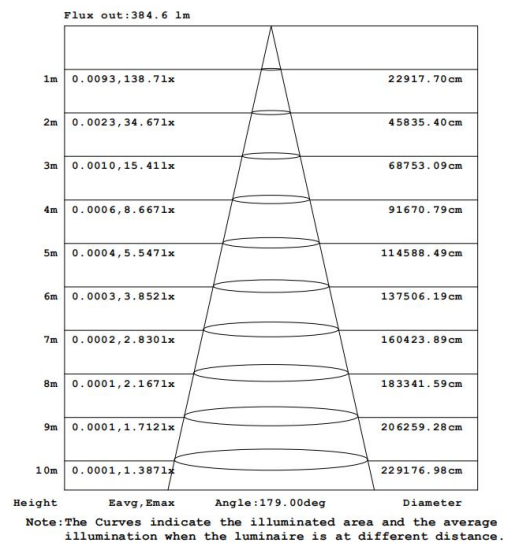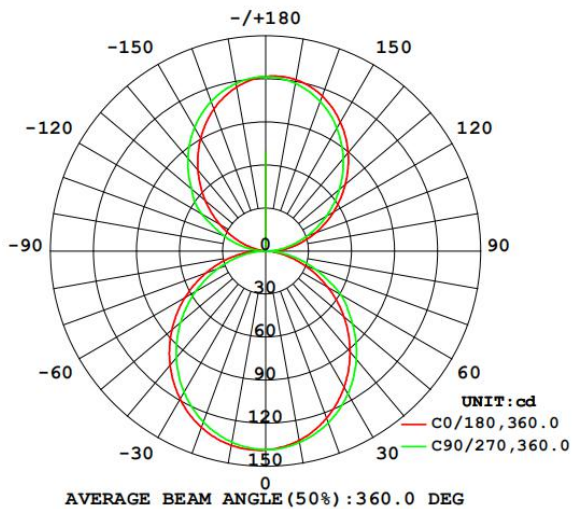

Package



Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
10A45	Hat box	485*315*185mm	5.76	8.76	12pcs/box
10A90	Hat box	825*435*185mm	11.4	14.4	12pcs/box