


# Specification







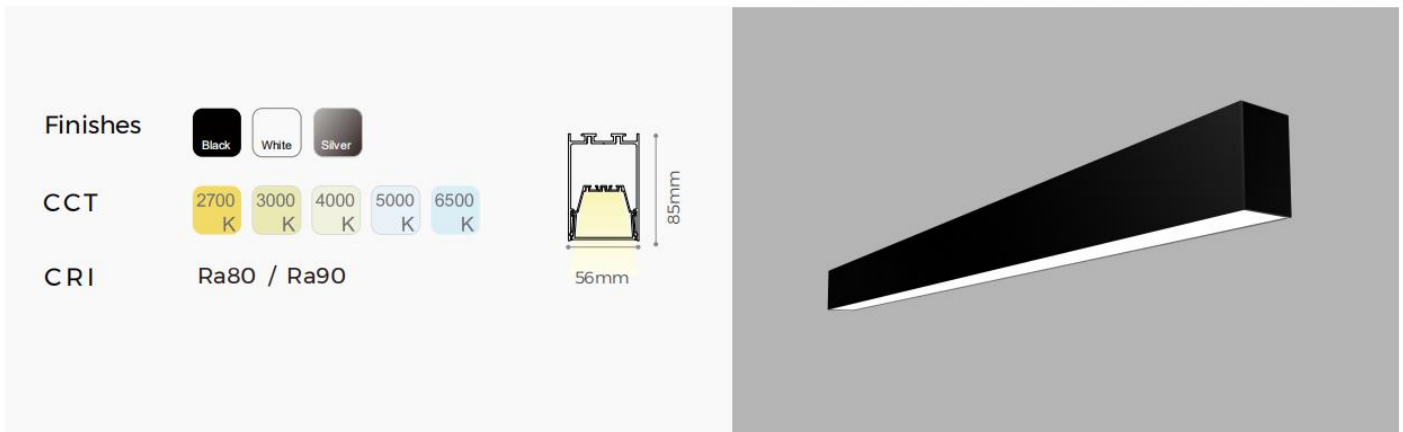



# LS60




- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- High light efficacy design, up to 125 lm/W.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional and plane.
- Multiple optical styles optional(diffuser, microprism, grating 12°/24°/38°, asymmetric , double asymmetric), meet the needs of multiple applications.


## Optical & electronic data :

								
	Diffuser	Microprism	Louven	Grating 12°	Grating 24°	Grating 38°	Asymmetric	Double asymmetric
1200mm	37W/3885LM	37W/3300LM	38W/2600LM	30W/2850LM	30W/3000LM	30W/2700LM	27W/3100LM	27W/3500LM
2400mm	68W/7150LM	68W/6120LM	/	/	/	/	/	/


Remark :  
 1、 the tolerance of output data can be vary up to 10%;  
 2、 the output data is typical value;

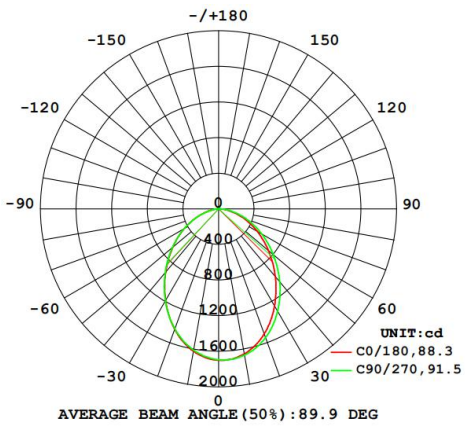


1.2m luminaire with Diffuser

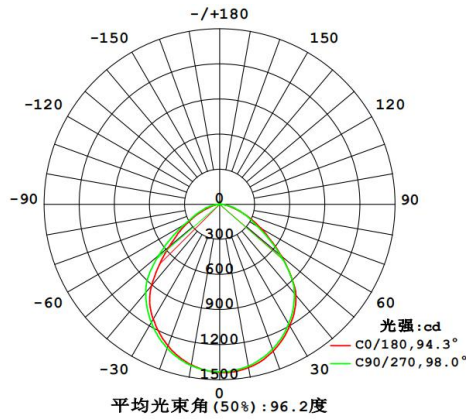


1.2m luminaire with Microprism

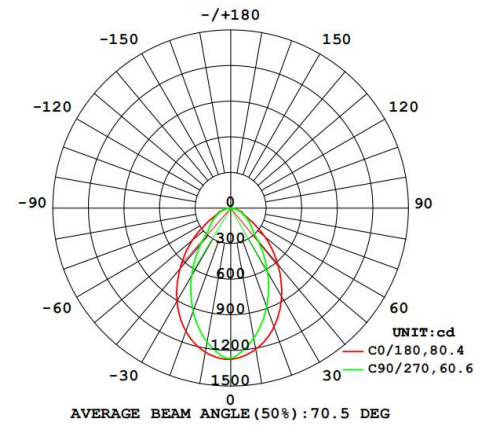


1.2m luminaire with Louven

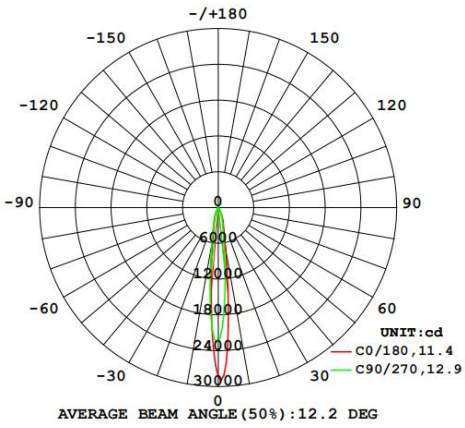


1.2m luminaire with Grating 12°

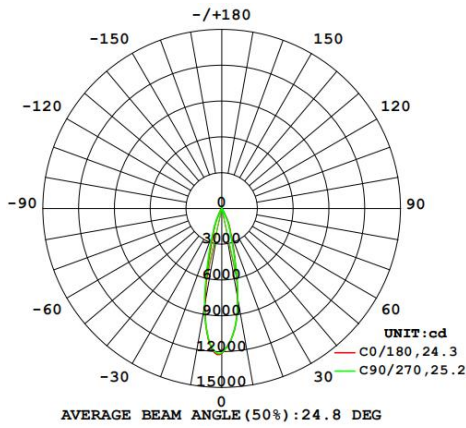


1.2m luminaire with Grating 24°

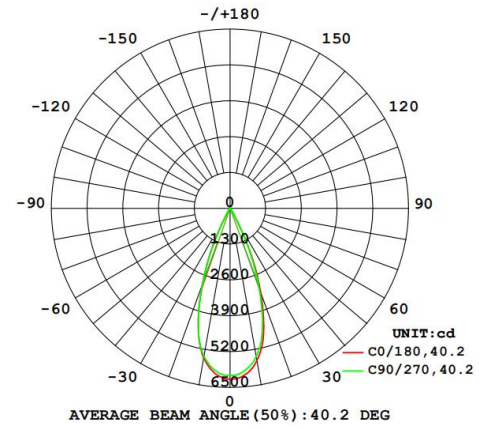

1.2m luminaire with Grating 38°

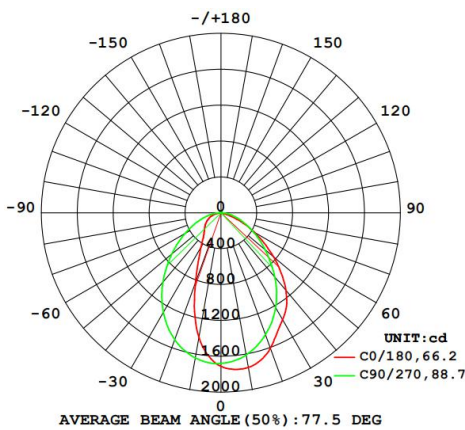

1.2m luminaire with Asymmetric

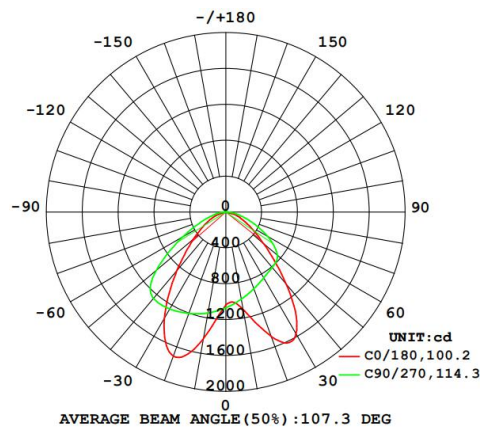

1.2m luminaire with Double Asymmetric

## Description about label information :

<b>LLS-LH25</b>		<b>sel</b> LIGHTING	
<b>Luminous flux(up):</b> 3850LM		<b>Type:</b> Luminaire	
<b>Luminous flux(down):</b> 5000LM		<b>Part NO:</b> LLS-LH25FPXB2400-F40W8X-DC	
<b>Power(Typ):</b> 40W/M		<b>SO:</b>	
<b>CCT:</b> 6500K		<b>NO:</b>	
<b>CRI:</b> >80		<b>Color:</b> Black	
<b>Input voltage:</b> 24VDC		<b>Cover type:</b> Microprism	
		<b>Size:</b> 25x100x2413mm	
		<b>Date:</b>	
Terminal block not included. Installation must be performed by a qualified person.			

## Ordering code :

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Light Source Power	CCT	CRI	Power Type	Package	Label Type	
Stylish Lighting system	LLS - Pendant	LS 60	Flat	F	Diffuser D	NO Carrier X	Silver S	Holeless end cap S	1200MM	Constant Current strip T	68W 68	2700K SW	>80 8	0-10V Dimming B -	SE L Individual L	SE L L
			Lens L	Micro-prism P	Carrier F	Black B	2400MM	3000K WW	>90 9						Customized S	
			Grating G	12" E	White W	4000K NW										
			Louven B	24" F	5000K DW											
			Transparent T	38" H	6500K W											

Ordering luminaires kits

LLS-LS60DFSS2400-T68NW8B-LL



## Attentions :

- Please install the product in the right environment as much as possible ;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock ;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit ;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.