

PRO Series Specification

# D8192


## 24V-15mm

---





## 【General description】

- Luminance efficiency up to 155LM/W
- Self-encapsulated design offers eight optional 1900-6000K white lights
- With life span over 60000H
- Ta: -25-40°C; Tc: 75°C (max)

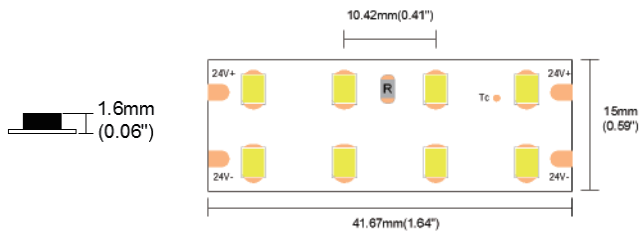

## 【Dimension】

- |                                     |  |
|-------------------------------------|--|
| Input voltage: DC24V                | Max.length: 4000mm(13.1')              |
| CRI: 80/90/95                       | Cutting unit: 8leds/41.67mm(1.64")     |
| Max.power: 20.8W(1m)                | LED pitch: 10.42mm(0.41")              |
| Power range: 17~20.8W(1m)           | Min. bend diameter: $\Phi$ 60mm(2.36") |
| Rated current: 0.79A(1m) /2.7A(4m)  | Mounting: 3M tape                      |
| Typical Power: 18.9W(1m) /64.8W(4m) | Copper foil: 3oz                       |
| tape IP: IP20/IP65                  |  |
| On-off times: 10000 (test times)    |  |
| Warranty: 5years                    |  |




## 【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>80	GW	1900K	2220	675	117	F
Ra>80	LW	2300K	2470	750	131	E
Ra>80	SW	2700K	2670	810	141	E
Ra>80	WW	3000K	2810	855	149	D
Ra>80	PW	3500K	2855	870	151	D
Ra>80	NW	4000K	2930	890	155	D
Ra>80	DW	5000K	2930	890	155	D
Ra>80	W	6000K	2810	855	149	D
Ra>90	GW	1900K	1780	540	94	/
Ra>90	LW	2300K	1980	600	105	F
Ra>90	SW	2700K	2140	650	113	F
Ra>90	WW	3000K	2250	685	119	E
Ra>90	PW	3500K	2285	695	121	E
Ra>90	NW	4000K	2345	710	124	E
Ra>90	DW	5000K	2345	710	124	E
Ra>90	W	6000K	2250	685	119	E

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>95	GW	1900K	1760	535	93	/
Ra>95	LW	2300K	1960	595	104	F
Ra>95	SW	2700K	2120	645	112	F
Ra>95	WW	3000K	2230	675	118	F
Ra>95	PW	3500K	2290	695	121	E
Ra>95	NW	4000K	2325	705	123	E
Ra>95	DW	5000K	2325	705	123	E
Ra>0	G	525nm	1700	515	90	/
Ra>0	B	470nm	378	115	20	/

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1merter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

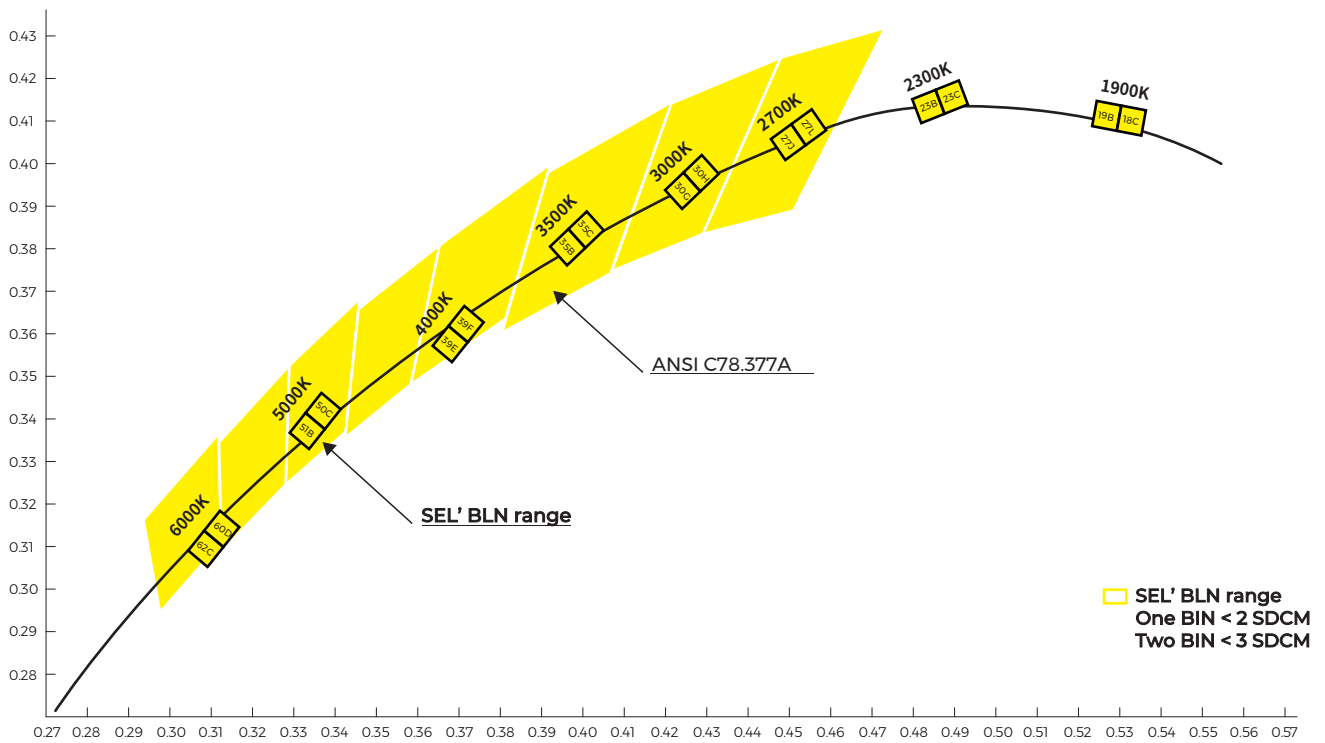


**[Electronic & output data]**


IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO		No proof	15mm*1.6mm	1900K/2300K/2700K/3000K/3500K/4000K/5000K/6000K/G/B	100%
NA		Nano-proof	15mm*1.7mm	1900K/2300K/2700K/3000K/3500K/4000K/5000K/6000K/G/B	98%

## 【Packing】

SEL brand package

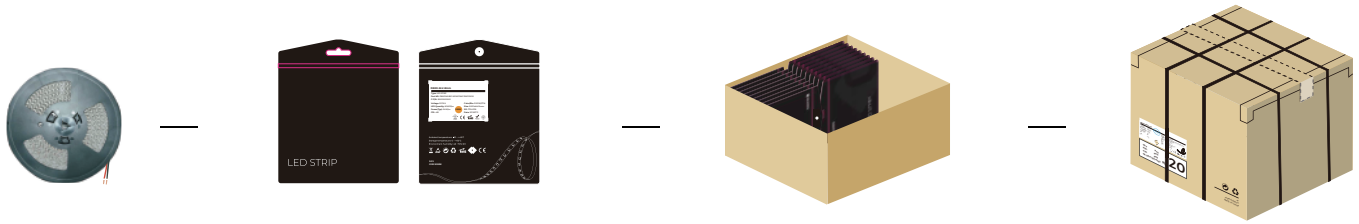

General customized package

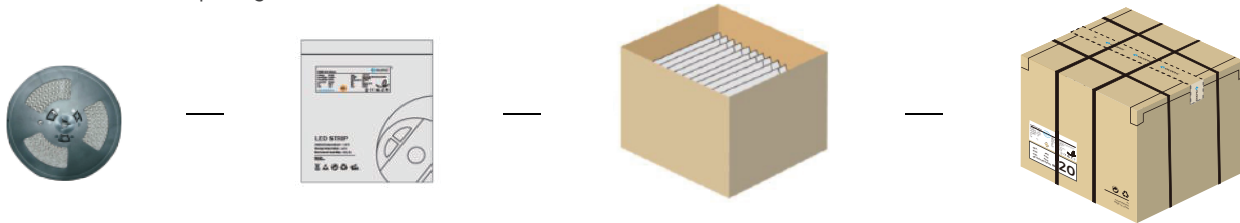

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	5000*10*1.6	5	250	0.14	7	8.05	41*41*26
NA	5000*10*1.7	5	250	0.144	7.2	8.28	41*41*26

Remark: data with 10% tolerance

## 【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃.Storage temperature: 0℃~60℃.Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP processof the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.