


90+ LIGHTING



COMPLIANT
EVERYTIME



VIBRANT
EVERYTIME

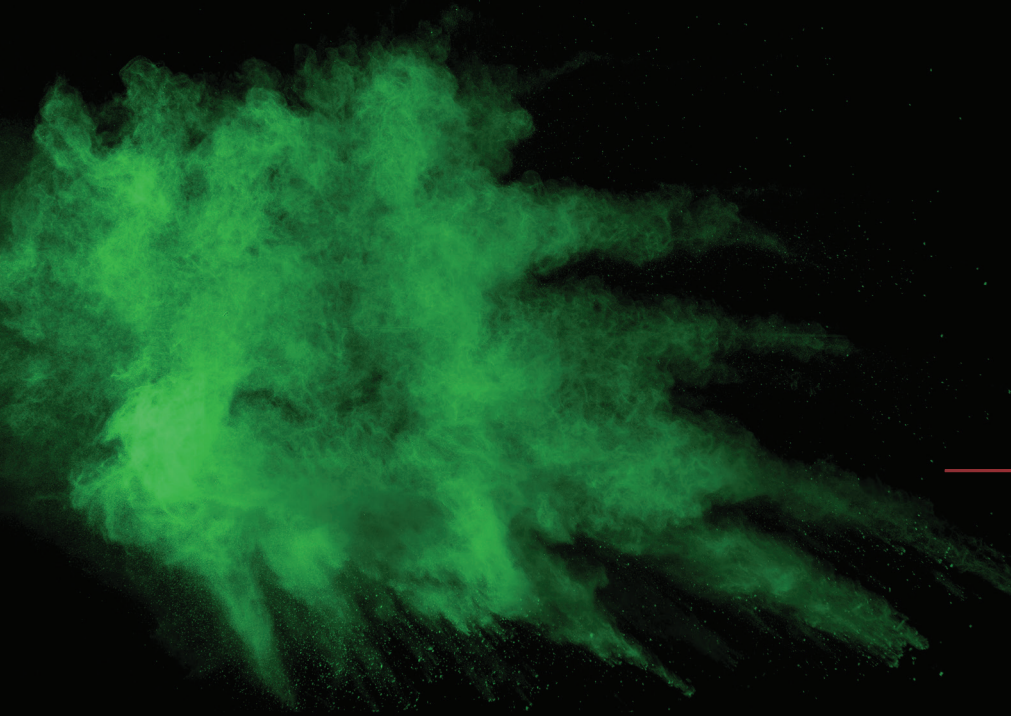

AFFORDABLE
EVERYTIME

At 90+ Lighting, we are determined to close the gap between quality and price. We offer high quality LED products at competitive prices with everything we produce, promote, and provide to the market. Everything that we offer meets exceptional standards for quality of light, reliability, compliance and availability. All this, while offering products that are affordable. 90+ Lighting only offers LED lamps and fixtures that are 90 + CRI, R9 >50 and flicker <30 %, with a 3- year, 25,000 hour warranty. All our products, even those not required by standard, meet these metrics.

WITH 90+ LIGHTING YOU CAN HAVE IT ALL.

VIBRANT **COLOR** AFFORDABLE **PRICING**
COMPLIANT **PERFORMANCE**

CRI **90+** R9 **>50** FLICKER **<30%**

* Product with CRI 80+ or R9>0

QUICKSHIP FROM OUR TEXAS WAREHOUSE

SEE <http://90pluslighting.com/quickship>

A-TYPE



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.045	A15	E26	450	6W	2700K	270°	40W	120V	ETL ES T20 JA8	-
SE-350.046	A15	E26	450	6W	3000K	270°	40W	120V	ETL ES T20 JA8	-
SE-350.069	A19	E26	800	9W	2700K	270°	60W	120V	ETL ES T20 JA8	Enclosed Location
SE-350.070	A19	E26	800	9W	3000K	270°	60W	120V	ETL ES T20 JA8	Enclosed Location
SE-350.049	A19	E26	800	10W	2700K	270°	60W	120V	ETL ES T20	-
SE-350.050	A19	E26	800	10W	3000K	270°	60W	120V	ETL ES T20	-
SE-350.067	A19	E26	800	10W	2700K	270°	60W	120V	ETL ES T20 JA8	-
SE-350.068	A19	E26	800	10W	3000K	270°	60W	120V	ETL ES T20 JA8	-
SE-350.089	A19	GU24	800	10W	2700K	270°	60W	120V	ETL ES T20 JA8	-
SE-350.090	A19	GU24	800	10W	3000K	270°	60W	120V	ETL ES T20 JA8	-
SE-350.051	A21	E26	1100	14W	2700K	270°	75W	120V	ETL ES T20 JA8	-
SE-350.052	A21	E26	1100	14W	3000K	270°	75W	120V	ETL ES T20 JA8	-
SE-350.053	A21	E26	1600	17W	2700K	270°	100W	120V	ETL ES T20 JA8	-
SE-350.054	A21	E26	1600	17W	3000K	270°	100W	120V	ETL ES T20 JA8	-
SE-350.091	A21	GU24	1600	17W	2700K	270°	100W	120V	ETL ES T20 JA8	-
SE-350.092	A21	GU24	1600	17W	3000K	270°	100W	120V	ETL ES T20 JA8	-
SE-350.093	A21	E26D	450 800 1600	17W	2700K	270°	30 60 100	120V	ETL ES T20	3-Way
SE-350.149	A21	E26D	450 800 1600	17W	3000K	270°	30 60 100	120V	ETL ES T20	3-Way

BR



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-RCU01.1107-B	BR20	E26	540	6W	2700K	110°	50W	120V	UL T20 JA8	-
SE-350.023	BR30	E26	650	9W	2700K	105°	65W	120V	ETL ES T20 JA8	-
SE-350.024	BR30	E26	650	9W	3000K	105°	65W	120V	ETL ES T20 JA8	-
SE-RCU02.1111-B	BR30	E26	810	9W	2700K	105°	65W	120V	UL ES T20 JA8	-
SE-RCU02.1111-B.11W	BR30	E26	800	11W	2700K	110°	65W	120V	UL ES T20 JA8	-
SE-RCU03.1113	BR40	E26	1000	11W	2700K	110°	75W	120V	UL ES T20 JA8	-
SE-RCU03.1113.13W	BR40	E26	1000	13W	2700K	110°	75W	120V	UL ES T20 JA8	-
SE-350.027	BR40	E26	1400	20W	2700K	105°	100W	120V	ETL ES T20 JA8	-
SE-350.028	BR40	E26	1400	20W	3000K	105°	100W	120V	ETL ES T20 JA8	-

CHANDELIER



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.041	C12	E12	320	4.5W	2700K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.154	C12	E12	320	4.5W	3000K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.043	C12	E12	320	4.5W	2700K	180°	40W	120V	ETL ES T20 JA8	Frosted
SE-350.151	C12	E12	320	4.5W	3000K	180°	40W	120V	ETL ES T20 JA8	Frosted
SE-350.184*	C12	E12	350	4.5W	2700K	110°	40W	120V	UL ES	Frosted
SE-RL6.CP05.1105 *	C12	E12	350	5W	2700K	110°	40W	120V	UL	Frosted
SE-350.042	C12	E26	320	4.5W	2700K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.153	C12	E26	320	4.5W	3000K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.044	C12	E26	320	4.5W	2700K	180°	40W	120V	ETL ES T20 JA8	Frosted
SE-350.152	C12	E26	320	4.5W	3000K	180°	40W	120V	ETL ES T20 JA8	Frosted

FILAMENT (CLEAR)



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.113	B11	E12	300	3.3W	2700K	360°	40W	120V	UL ES T20 JA8	Dimmable
SE-350.114	BA11	E12	300	3.3W	2700K	360°	40W	120V	UL T20 JA8	Dimmable
SE-350.176	S14	E26	70	1W	2450K	360°	5W	120V	UL	Wet Location
SE-350.177	S14	E26	70	1W	2700K	360°	5W	120V	UL	Wet Location
SE-350.178	S14	E26	70	1W	3000K	360°	5W	120V	UL	Wet Location
SE-350.115	A19	E26	350	3.8W	2700K	360°	40W	120V	UL T20	Dimmable
SE-350.116	A19	E26	420	6.2W	2500K	360°	40W	120V	UL	Dimmable, Silver Tip
SE-350.162	A19	E26	810	9W	2700K	360°	60W	120V	UL ES T20	Dimmable
SE-RCL06.1107-A *	ST19	E26	800	7W	2700K	320°	-	120V	UL ES	Dimmable, Wet Location
SE-350.117	ST21	E26	350	3.8W	2700K	360°	40W	120V	UL T20	Dimmable

FILAMENT (AMBER)



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.118	B11	E12	300	3.3W	2200K	360°	40W	120V	UL ES T20	-
SE-350.119	BA11	E12	300	3.3W	2200K	360°	40W	120V	UL T20	-
SE-350.161	T6	E12	160	2W	2200K	360°	25W	120V	UL	-
SE-350.126	T10	E26	160	2W	2200K	360°	25W	120V	UL	-
SE-350.127	T14	E26	160	2W	2200K	360°	25W	120V	UL	-
SE-350.121	G16.5	E12	300	3.3W	2200K	360°	40W	120V	UL T20	-
SE-350.122	G25	E26	350	3.8W	2200K	360°	40W	120V	UL T20	-
SE-350.120	A19	E26	350	3.8W	2200K	360°	40W	120V	UL T20	-
SE-350.163	A19	E26	810	9W	2200K	360°	60W	120V	UL T20	-
SE-RCL06.1107-B *	ST19	E26	600	7W	2200K	320°	60W	120V	UL ES	Wet Location
SE-350.124	ST21	E26	350	3.8W	2200K	360°	40W	120V	UL T20	-

G-TYPE



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.033	G16.5	E12	350	5W	2700K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.034	G16.5	E12	350	5W	3000K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.029	G16.5	E12	350	5W	2700K	180°	40W	120V	ETL ES T20 JA8	Frosted
SE-350.030	G16.5	E12	350	5W	3000K	180°	40W	120V	ETL ES T20 JA8	Frosted
SE-350.035	G16.5	E26	350	5W	2700K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.036	G16.5	E26	350	5W	3000K	260°	40W	120V	ETL ES T20 JA8	Clear
SE-350.031	G16.5	E26	350	5W	2700K	180°	40W	120V	ETL ES T20 JA8	Frosted
SE-350.032	G16.5	E26	350	5W	3000K	180°	40W	120V	ETL ES T20 JA8	Frosted
SE-RL6.CO30.1106 *	G25	E26	400	6W	2700K	230°	40W	120V	UL	Clear
SE-350.037	G25	E26	500	7W	2700K	260°	60W	120V	ETL ES T20 JA8	Clear
SE-350.038	G25	E26	500	7W	3000K	260°	60W	120V	ETL ES T20 JA8	Clear
SE-350.039	G25	E26	500	7W	2700K	180°	60W	120V	ETL ES T20 JA8	Frosted
SE-350.040	G25	E26	500	7W	3000K	180°	60W	120V	ETL ES T20 JA8	Frosted

PAR



S : Short Neck
L : Long Neck

SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.181	PAR 20	E26	500	5.5W	2700K	40°	50W	120V	UL ES T20 JA8	Wet Location
SE-350.009	PAR 20	E26	500	7W	2700K	40°	50W	120V	ETL ES T20 JA8	-
SE-350.010	PAR 20	E26	500	7W	3000K	40°	50W	120V	ETL ES T20 JA8	-
SE-350.011	PAR 30 S	E26	750	10W	2700K	40°	75W	120V	ETL ES T20 JA8	-
SE-350.012	PAR 30 S	E26	750	10W	3000K	40°	75W	120V	ETL ES T20 JA8	-
SE-350.013	PAR 30 L	E26	750	10W	2700K	40°	75W	120V	ETL ES T20 JA8	-
SE-350.014	PAR 30 L	E26	750	10W	3000K	40°	75W	120V	ETL ES T20 JA8	-
SE-RL6.CE11.1412G	PAR 30 L	E26	850	12W	2700K	40°	75W	120V	UL ES T20 JA8	Wet Location
SE-350.179	PAR 38	E26	1050	12W	2700K	40°	90W	120V	UL ES T20 JA8	Wet Location
SE-350.017	PAR 38	E26	1350	18W	2700K	40°	100W	120V	ETL ES T20 JA8	-
SE-350.018	PAR 38	E26	1350	18W	3000K	40°	100W	120V	ETL ES T20 JA8	-

MR



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.164	MR16	GU5.3	365	5W	2700K	25°	35W	12V	UL ES T20 JA8	-
SE-350.165	MR16	GU5.3	365	5W	2700K	40°	35W	12V	UL ES T20 JA8	-
SE-350.166	MR16	GU5.3	365	5W	3000K	25°	35W	12V	UL ES T20 JA8	-
SE-350.167	MR16	GU5.3	365	5W	3000K	40°	35W	12V	UL ES T20 JA8	-
SE-350.073	MR16	GU5.3	390	7W	3000K	10°	30W	12V	UL T20 JA8	-
SE-350.001	MR16	GU5.3	420	7W	2700K	10°	30W	12V	UL T20 JA8	-
SE-350.074	MR16	GU5.3	470	7W	3000K	24°	35W	12V	UL T20 JA8	-
SE-350.002	MR16	GU5.3	480	7W	2700K	24°	35W	12V	UL T20 JA8	-
SE-350.155	MR16	GU5.3	500	7W	3000K	25°	50W	12V	UL ES JA8	-
SE-350.156	MR16	GU5.3	500	7W	3000K	40°	50W	12V	UL ES JA8	-
SE-RL5.AK02.1107G	MR16	GU5.3	500	7W	2700K	40°	50W	12V	UL ES JA8	-
SE-350.003	MR16	GU10	420	7W	2700K	10°	60W	120V	UL T20 JA8	-
SE-350.004	MR16	GU10	440	7W	2700K	24°	60W	120V	UL T20 JA8	-
SE-RL5.CI02.1107G	MR16	GU10	450	7W	2700K	40°	50W	120V	UL ES JA8	-
SE-350.005	MR16	GU10	500	7W	2700K	40°	50W	120V	ETL ES T20 JA8	-
SE-350.006	MR16	GU10	500	7W	3000K	40°	50W	120V	ETL ES T20 JA8	-

DOWNLIGHT



SKU	FORMS	LAMP BASE	LUMENS	WATTS	CCT	BEAM	EQUIV.	VOLTAGE	COMPLIANCE	FEATURE
SE-350.055	RETROFIT 4"	E26	720	10W	2700K	100°	-	120V	ETL ES T20 JA8	-
SE-350.056	RETROFIT 4"	E26	720	10W	3000K	100°	-	120V	ETL ES T20 JA8	-
SE-350.057	RETROFIT 4"	E26	720	10W	4000K	100°	-	120V	ETL ES T20 JA8	-
SE-350.058	RETROFIT 4"	E26	720	10W	5000K	100°	-	120V	ETL ES T20	-
SE-350.059	RETROFIT 5" TO 6"	E26	850	11W	2700K	100°	-	120V	ETL ES T20 JA8	-
SE-350.060	RETROFIT 5" TO 6"	E26	850	11W	3000K	100°	-	120V	ETL ES T20 JA8	-
SE-350.061	RETROFIT 5" TO 6"	E26	850	11W	4000K	100°	-	120V	ETL ES T20 JA8	-
SE-350.062	RETROFIT 5" TO 6"	E26	850	11W	5000K	100°	-	120V	ETL ES T20	-
SE-350.063	RETROFIT 5" TO 6"	E26	1100	15W	2700K	100°	-	120V	ETL ES T20 JA8	-
SE-350.064	RETROFIT 5" TO 6"	E26	1100	15W	3000K	100°	-	120V	ETL ES T20 JA8	-
SE-350.065	RETROFIT 5" TO 6"	E26	1100	15W	4000K	100°	-	120V	ETL ES T20 JA8	-
SE-350.066	RETROFIT 5" TO 6"	E26	1100	15W	5000K	100°	-	120V	ETL ES T20	-



"This is the LED company I've been waiting for so many years! Their combination of excellent color and beam, rock-solid quality, and availability across a wide range of products and forms makes it the obvious choice for the applications we care about today - residential, hospitality and retail lighting."

Randall Whitehead - Top residential lighting expert, designer author and speaker.





1094 Cudahy Place, Suite 212 - San Diego, CA 92110
(619) 340-1203 | contact@90pluslighting.com
www.90pluslighting.com