



# Specification

Architecture lighting integration series

SK6013(B)




## SK6013(B)

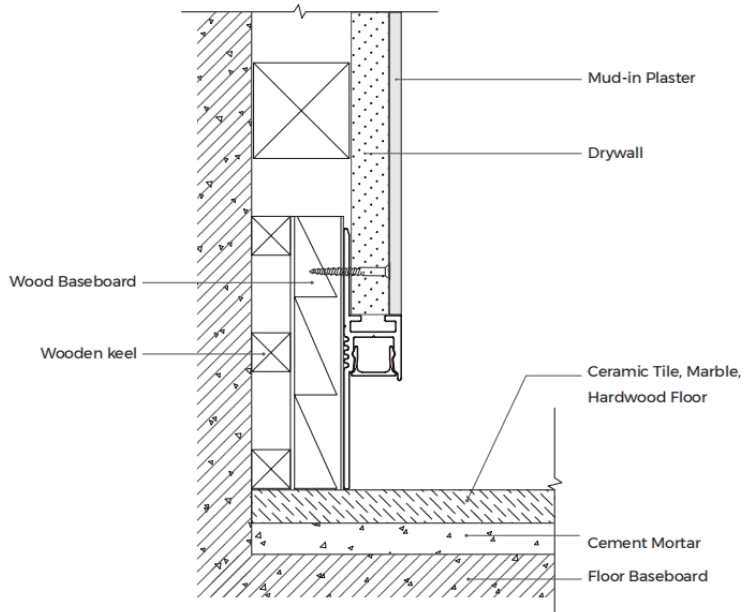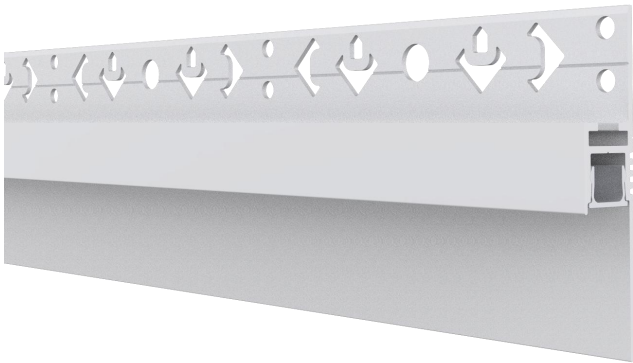

### Features

- Apply to skirting board , integrated into architecture.
- Indirect lighting design integrates architectural and lighting effects.
- AL6063-T5 aluminum profile with high-quality surface treatment.

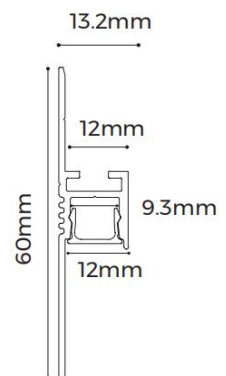

## Standard Configuration



| Picture                                                                           | Item    | Parameter                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Profile | Profile weight : 0.8kg/2.5m<br>Size : L2500*W13.2*H60mm<br>Material : AL6063-T5<br>Surface processing : Spraying RAL9003                                                                             |
|  | cover   | Type: Frosted diffuser<br>Material : PC<br>Light transmittance : 80%<br>Size : L2500*W10.3*H6.8mm<br>PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C. |

## Optional Accessories


| Picture                                                                             | Item                            | Parameter                                                                                                                                            |
|-------------------------------------------------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Flexible strip<br>D6140-24V-8mm | Material : FPC,CCT : 2700/3000/4000/6000K ; CRI > 90 ; Voltage : 24V ;Power :6.6W/m ;Lumen :710Lm/m ;Width :8mm ;Minimum cutting unit : 7LEDs/50mm ; |

## Optical Parameter

(D6140-24V-8mm light source, frosted diffuser)

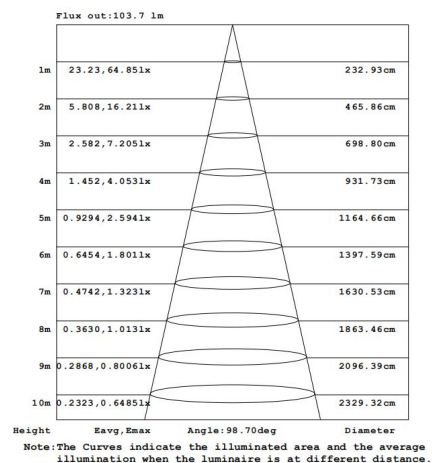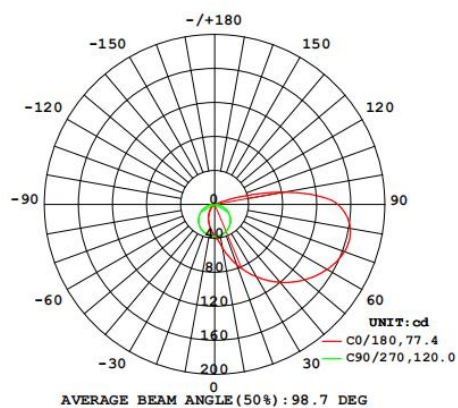

## Package

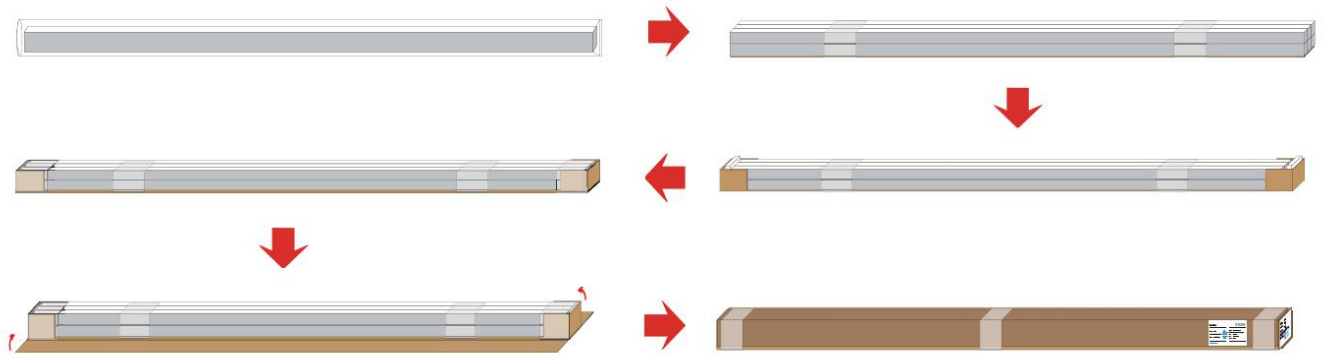

| Item    | Type        | Size(mm)       | NW(kg) | GW(kg) | Content   |
|---------|-------------|----------------|--------|--------|-----------|
| Profile | Packing box | 2600*210*150mm | 28.3   | 30.5   | 36pcs/box |